



STR10

Two-Pinned Arch

For studies of the characteristics of a two-pinned arch under various load conditions

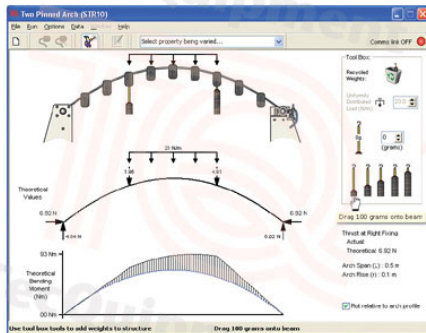

Screenshot of the optional TecEquipment Structures Software

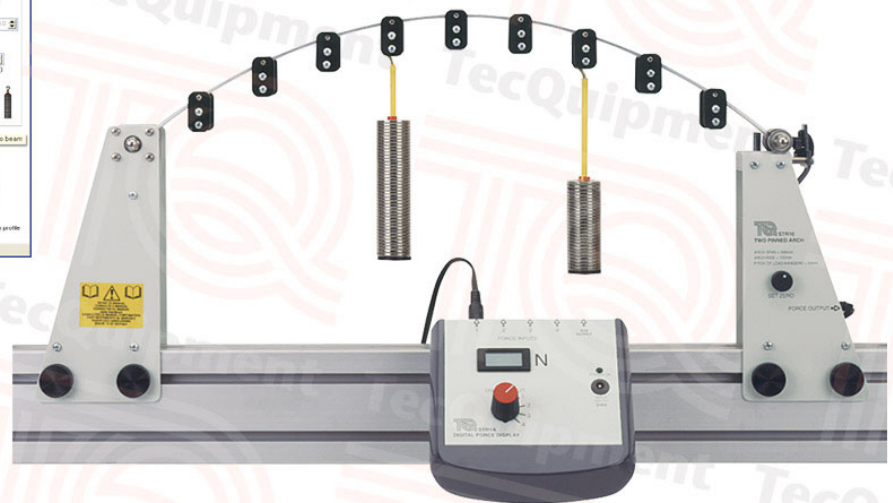

Shown fitted to the Structures Test Frame and connected to a Digital Force Display (both supplied separately)

- High-quality structures teaching module for students of mechanical, civil and structural engineering
- Allows safe and practical experiments into two-pinned arches
- Realistic and verifiable experiment results
- Optional TecEquipment's Structures Software package for extra 'virtual' experiments that simulate and confirm the results from your hardware and allow extended experiments
- Optional STR2000 unit with TecEquipment's Structures Software package for automatic data acquisition **and** virtual experiments
- One of many interchangeable experiment modules from TecEquipment's modern, flexible and cost-effective structures teaching system
- Ideal for classroom demonstrations, or students working in pairs or small groups

- TecEquipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- T +44 115 972 2611 • F +44 115 973 1520 • E info@tecquipment.com • W www.tecquipment.com
- An ISO 9001 certified company

STR10

Two-Pinned Arch

Description

The experiment hardware fits onto the Structures Test Frame (STR1, available separately). Students use masses on weight hangers to apply various loads to the arch at set positions along its span.

One end of the arch is pivoted, the other end rolls against a load cell. When connected to a Digital Force Display (STR1a, available separately), the load cell measures the thrust reaction. The equipment includes a lead to connect the load cell to a Digital Force Display (STR1a).

The lecturer guide provides details of the equipment including sample experiment results. The student guide describes how to use the equipment and gives experiment procedures.

For extra 'virtual' experiments, TecEquipment can supply the optional TecEquipment Structures Software (STRS), for use on a suitable computer. The virtual experiments simulate the tests you can perform with the hardware. They also extend the choice of tests beyond that available using only the hardware, for example: higher loads, uniform loads or different test specimens. This extends the student's learning experience.

For automatic data acquisition of your experiment results, TecEquipment can supply the optional Automatic Data Acquisition Unit (STR2000). Supplied as standard with the STR2000 is TecEquipment's Structures Software that displays and logs your experiment results and gives the extra virtual experiments.

Standard Features

- Supplied with lecturer guide and student guide
- Two-year warranty
- Made in accordance with the latest European Union directives

Experiments

- Demonstration of the characteristics of a two-pinned arch
- Examination of the relationship between applied loads and horizontal thrust produced from a redundant (in one degree) arched structure
- Comparison of behaviour to simplified theory based on the Secant assumption

Essential Ancillaries

- Structures Test Frame (STR1)
- Digital Force Display (STR1a)

Recommended Ancillaries

- Structures Software (STRS) for virtual experiments
- or**
- Automatic Data Acquisition Unit (STR2000) for automatic data acquisition **and** virtual experiments

Operating Conditions

Operating environment:
Laboratory environment

Storage temperature range:
-25°C to +55°C (when packed for transport)

Operating temperature range:
+5°C to +40°C

Operating relative humidity range:
80% at temperatures < 31°C decreasing linearly to 50% at 40°C

Specification

Nett dimensions and weight:
700 x 310 x 70 mm, 4.5 kg

Packed dimensions and weight:
Approximately 0.078 m³, 6 kg

Loads:
9 weight hangers and 150 x 10 g masses

Arch:
100 mm rise, 500 mm span

Accessories:
Rule