
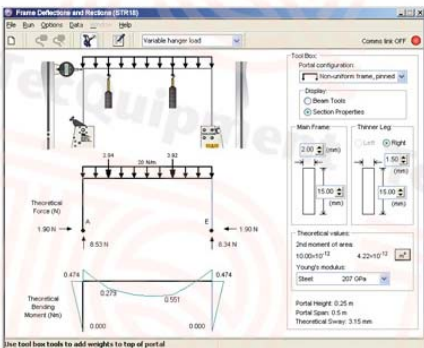



STR2000

Automatic Data Acquisition Unit

Connects any of the Structures range experiments to a computer – includes TecQuipment’s Structures Software for automatic data acquisition and virtual experiments

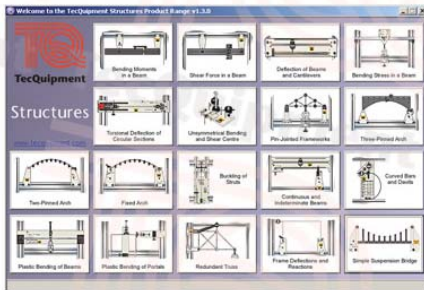

Screenshots of TecQuipment’s Structures Software (included with the STR2000)

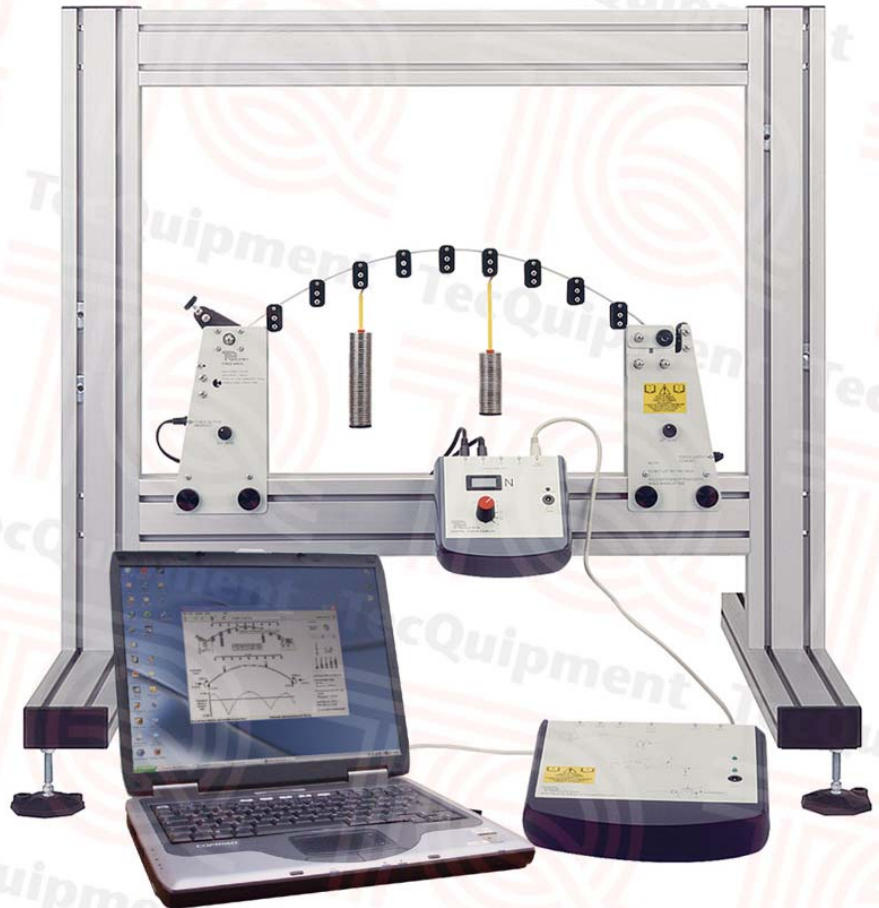

The STR2000 computer interface unit shown transmitting data from one of the Structures hardware experiment modules to the Structures Software

- Computer interface and TecQuipment’s Structures Software (STRS) to display and collect data from any of the experiment modules in TecQuipment’s Structures range (STR2 to STR19)
- Includes TecQuipment’s powerful Structures Software to do two things: display and collect data, and allow ‘virtual’ simulated experiments
- Interface unit links to load cells and other instruments in the Structures range to send data to a suitable computer
- Allows students to compare results from actual experiments with results from simulation software
- Simple connection to most modern computers – no need to add any extra circuit boards
- Fully automatic – needs no adjustments or complicated set-up procedures on your computer

- TecQuipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- T +44 115 972 2611 • F +44 115 973 1520 • E info@tecquipment.com • W www.tecquipment.com
- An ISO 9001 certified company



STR2000

Automatic Data Acquisition Unit

Description

The Automatic Data Acquisition Unit is an interface box with software that connects experiments from the TecEquipment Structures range to a suitable computer (computer not included). It allows data logging, analysis and extra 'virtual' simulated experiments. It accepts inputs from a digital force display, a digital strain display, an angular sensor and digital deflection indicators. It converts these inputs into the correct data signals for the computer. The software can then analyse the data and create tables and charts. The software can also simulate experiments which students can perform using the hardware, so they can compare simulated and real results.

Standard Features

- Supplied with comprehensive user guide
- Two-year warranty
- Made in accordance with the latest European Union directives

Essential Ancillaries

- Structures Test Frame (STR1)
- One or more experiment modules from the Structures Range (STR2–STR19)
- Suitable Computer

Essential Services

Electrical supply:

110 VAC to 240 VAC, 1 A, 50/60 Hz, with earth

Bench Space Needed:

300 mm x 300 mm (this is additional to the space needed for your Structures Experiment (STR2 to STR19).

Operating Conditions

Operating environment:

Laboratory environment

Storage temperature range:

–25°C to +55°C (when packed for transport)

Operating temperature range:

+5°C to +40°C

Operating relative humidity range:

80% at temperatures < 31°C decreasing linearly to 50% at 40°C

Specifications

Nett dimensions and weight:

230 mm x 220 mm x 40 mm, and 1.5 kg

Packed dimensions and weight:

0.02 m³ and 2.5 kg

Software:

Supplied on CD-ROM for installation onto a suitable computer with a Microsoft® Windows® operating system.

Minimum computer specifications needed:

- Microsoft® Windows® 2000, XP and Vista operating system
- VGA monitor capable of at least 16-bit colour at 800 x 600 resolution
- 40 MB available hard drive space
- 2 x USB port (1 for communications and 1 for software key - 'dongle')
- CD-ROM drive