




MANUAL VOLUMETRIC FUEL GAUGE

AVFI

Frame-mounted manual fuel gauge for use with either the Small Engine Test Set or the Regenerative Engine Test Set.

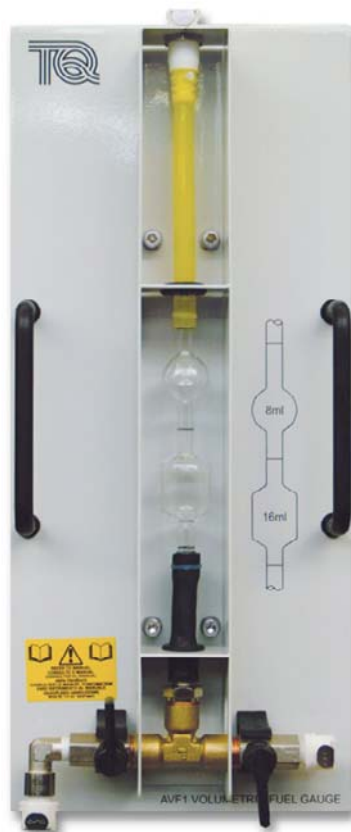

KEY FEATURES

- Volumetric fuel gauge for use with TecQuipment's Small Engine Test Set (TD200) and Regenerative Engine Test Set (TD300) and engines
- Convenient and accurate measurement of fuel consumption
- Easy to install and use
- Self-sealing couplings enable quick and efficient connection and disconnection of fuel lines with minimum loss or spillage of fuel



MANUAL VOLUMETRIC FUEL GAUGE

AVFI

DESCRIPTION

An easy-to-use, accurate volumetric fuel gauge for use with TecQuipment's engine test sets and engines (TD200 and TD300 series).

The fuel gauge consists of a precision-calibrated two-bulb pipette and control valves. It mounts on the instrumentation frame of the test set and connects between the fuel tank and the engine under test. All connections are made using self-sealing couplings. The couplings ensure the fuel gauge can be connected and disconnected quickly and efficiently with minimum loss or spillage of fuel.

Fuel enters the pipette from the tank. The fuel supply from the tank is then cut off via a valve so that the engine draws fuel from the pipette only. Students record the time taken to consume a set volume of fuel, from which they can accurately calculate the flow rate.

Suitable for use with petrol or diesel.

STANDARD FEATURES

- Five-year warranty
- Made in accordance with the latest European Union directives
- ISO9001 certified manufacturer

ESSENTIAL ANCILLARY

- Stopwatch (SW1)

ANCILLARY FOR

- Small Engine Test set (TD200)
- Regenerative Engine test Set (TD300)

OPERATING CONDITIONS

OPERATING ENVIRONMENT:

Well ventilated laboratory

STORAGE TEMPERATURE RANGE:

-25°C to +55°C (when packed for transport)

OPERATING TEMPERATURE RANGE:

+5°C to +40°C

OPERATING RELATIVE HUMIDITY RANGE:

80% at temperatures < 31°C decreasing linearly to 50% at 40°C

SPECIFICATIONS

TecQuipment is committed to a programme of continuous improvement; hence we reserve the right to alter the design and product specification without prior notice.

DIMENSIONS:

Width 180 mm x depth 125 mm x height 450 mm

Packed (total) 0.02 m³

WEIGHT:

Packed 5 kg

PIPETTE VOLUMES:

8 ml and 16 ml