


≡ SHELL AND TUBE HEAT EXCHANGER

TD1360C

Shows how a compact shell and tube bundle heat exchanger works.

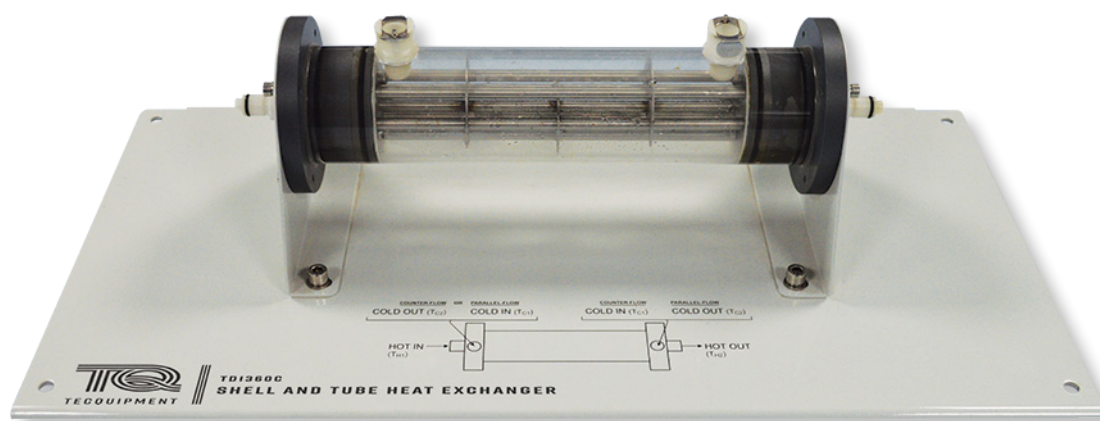

KEY FEATURES

- One of a set of optional heat exchangers for use with TecQuipment's TD1360V Heat Exchanger Service Module
- Popular type of heat exchanger, used in industry but designed for teaching
- Simple and safe to use – foolproof fittings allow students to change and connect the heat exchanger quickly and easily – needs no tools
- Clear outside casing, so students can see its construction
- Bedplate with a clear schematic diagram to help students understand how to connect the heat exchanger
- Corrosion-resistant materials for use with ordinary clean water at safe temperatures

≡ SHELL AND TUBE HEAT EXCHANGER

TD1360C

DESCRIPTION

This heat exchanger is one of the most common type used in industry. This is because it is compact, but can work at higher pressures than other designs. It is a large tube (shell) which surrounds several smaller tubes (a bundle). One fluid passes through the shell, and the other fluid passes through the tube bundle, therefore transferring heat. Baffles around the bundle help to create a turbulent mixed flow.

The Heat Exchanger Service Module (TD1360V) provides hot and cold water to the heat exchanger and all the instruments needed to measure its performance. All fluid connections to the heat exchanger are self-sealing quick connectors – for safety and simplicity. The hot and cold fluid streams have different connectors to reduce errors. Connecting the heat exchanger takes less than one minute.

The heat exchanger is on a bedplate that has a clear schematic diagram showing the connections.

STANDARD FEATURES

- Five-year warranty
- Made in accordance with the latest European Union directives
- ISO9001 certified manufacturer

LEARNING OUTCOMES

- Demonstration of heat transfer from one fluid to another through a solid wall.
- Energy balance and efficiency calculations.
- Demonstration of parallel-flow and counter-flow operation of heat exchangers.
- Measurement of the heat transfer coefficient, and the effect of fluid flow rates and the driving force (temperature differential) upon it.
- Introduction to the logarithmic mean temperature difference in heat exchangers.
- Comparison of different types of heat exchanger in terms of performance, size and relative cost (only if you have two or more optional heat exchangers).

ESSENTIAL BASE UNIT

- Heat Exchanger Service Module (TD1360V)

OPERATING CONDITIONS

OPERATING ENVIRONMENT:

Laboratory

STORAGE TEMPERATURE RANGE:

–25°C to +55°C (when packed for transport)

OPERATING TEMPERATURE RANGE:

+5°C to +40°C

OPERATING RELATIVE HUMIDITY RANGE:

80% at temperatures < 31°C decreasing linearly to 50% at 40°C

SOUND LEVELS

Less than 70 dB(A)

SPECIFICATIONS

TecEquipment is committed to a programme of continuous improvement; hence we reserve the right to alter the design and product specification without prior notice.

NETT DIMENSIONS AND WEIGHT:

130 mm (height), 345 mm (width), 250 mm (depth), 3.5 kg

OTHER DETAILS:

- Outer tube – transparent, 60 mm outside diameter and 50 mm inside diameter
- Tube bundle – 6 Stainless steel tubes, each 6 mm outside diameter and 4 mm inside diameter (1 mm wall), three baffles
- Mean heat transfer area 0.02 m²
- Connection to Service Module with quick connectors